# 16 ILIS inspired interior

CARVING WALLPAPER




Group Of Companies






# Time Honored Visionaries

Through an array of surreal designs we decorate your space like no other and enhance your modern urban aesthetic.

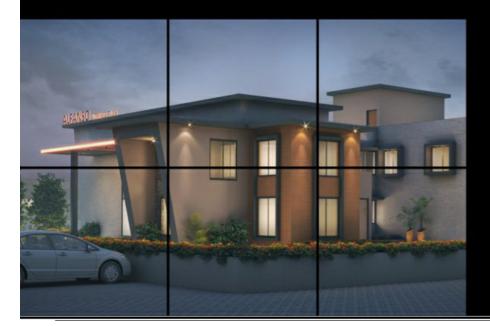



#### RESIDENTIAL SPACE











Applicable in both domestic and commercial themes, this collection is versatile and easy to maintain. As durable as it is aesthetic, these statement pieces will adorn your walls for a very long period without fading.

# BATHROOM SPACE

#### COMMERCIAL SPACE









## FEATURES













Hygienic Surface

Easy to Clean

Fire Resistance

Impact Resistance

Frost Resistance







Chemical

Resistance



Easy Installation

Thermal Shock

Crazing Resistance



### ACUARELA





ADRIAN MINT






TILE SIZE 60X60CM

SURFACE CARVING FINISH

AMALFI





### **CHILLBERRY**





DELIGHT FLOWER






TILE SIZE 60X60CM
SURFACE

CARVING FINISH

FIRE BALL





HEAVEN BELLY





LEON VINTAGE





MILAS FLORAL






TILE SIZE 60X60CM

SURFACE CARVING FINISH

### PALMERA





# SPARROW







TILE SIZE 60X60CM

SURFACE CARVING FINISH

### SWEDISH RETRO



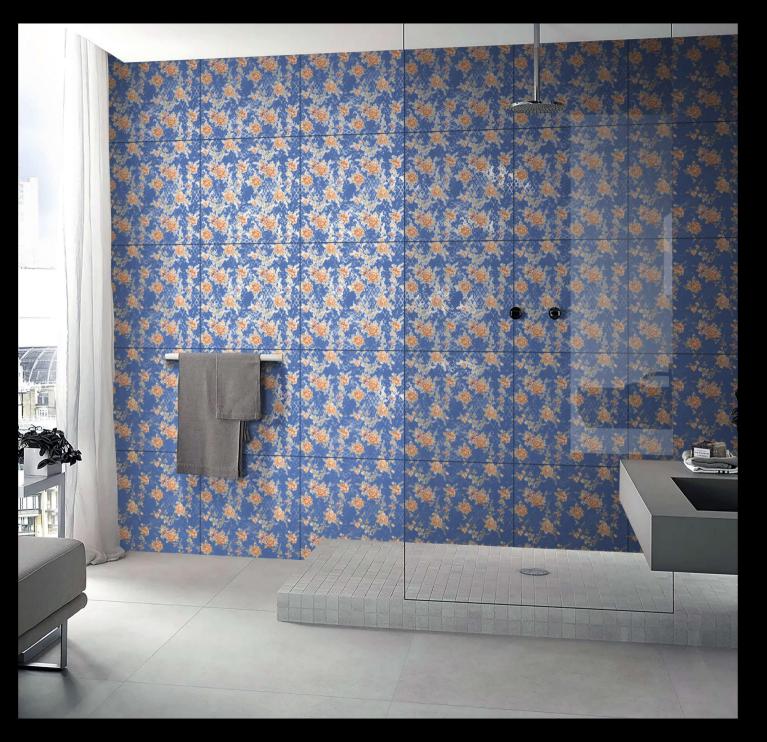

VERBENA BLUE





ZOFFANY GREEN





ZOFFANY RED



#### **TECHNICAL SPECIFICATION**

CHARACTERISTIC	STANDARD AS PER ISO-13006 / En14411 GROUP Bla	MEAN VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.3%	ISO-10545-2
Deviation in thickness	± 0.5%	± 4.0%	ISO-10545-2
Straightness in side	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Color difference	Uniterned	No change	ISO-10545-16
Glossiness	As per mfg.	Min 90 %	GLOSSO METER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of repture	Min. 35 N/mm²	Min. 40 N/mm²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 1800 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Resistance to surface abrasion (PEI RATING)	As per mfg.	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg.	Min. 5	EN 101
THERMO HYGROMRTRIC PROPERTIES		22	·
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nill	Nill	ISO-10545-10
Thermal expansion(COE)	Max. 9.0x10 <sup>-6</sup>	Max. 6.5x10 <sup>-6</sup>	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14
SEFETY PROPERTIES			
Slip resistance	As per mfg.	> 0.40	ISO-10545-17
Fire resistance	As per mfg.	Fireproof	N.A.
Lead & Cafmium given off by glazes tiles	As per mfg.	Does not yield Pb & Cd	ISO-10545-15

#### PACKING DETAILS

SIZE	THICKNESS	PIECES / BOX	AREA / BOX	WEIGHT / BOX
600x600mm	9mm (Approx)	4 pcs.	1.44 sq. mtr.	28.5 kgs